










	VDC	mw			nm	10Lux (K)	M	100		(ms)		
								10				
Ø3	GL3516	100	50	-30 +70	540	5-10	0.6	0.5	30	30	2	
	GL3526	100	50	-30 +70	540	10-20	1	0.6	30	30	3	
	GL3537-1	100	50	-30 +70	540	20-30	2	0.6	30	30	4	
	GL3537-2	100	50	-30 +70	540	30-50	3	0.7	30	30	4	
	GL3547-1	100	50	-30 +70	540	50-100	5	0.8	30	30	6	
	GL3547-2	100	50	-30 +70	540	100-200	10	0.9	30	30	6	

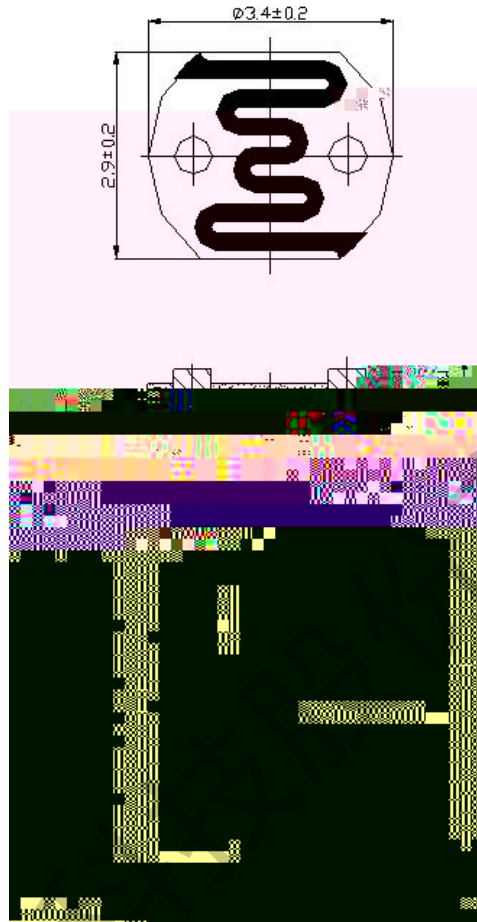

Relative Resistance (%)
電阻變化率 (%)

Relative Response (%)
相對靈敏度 (%)

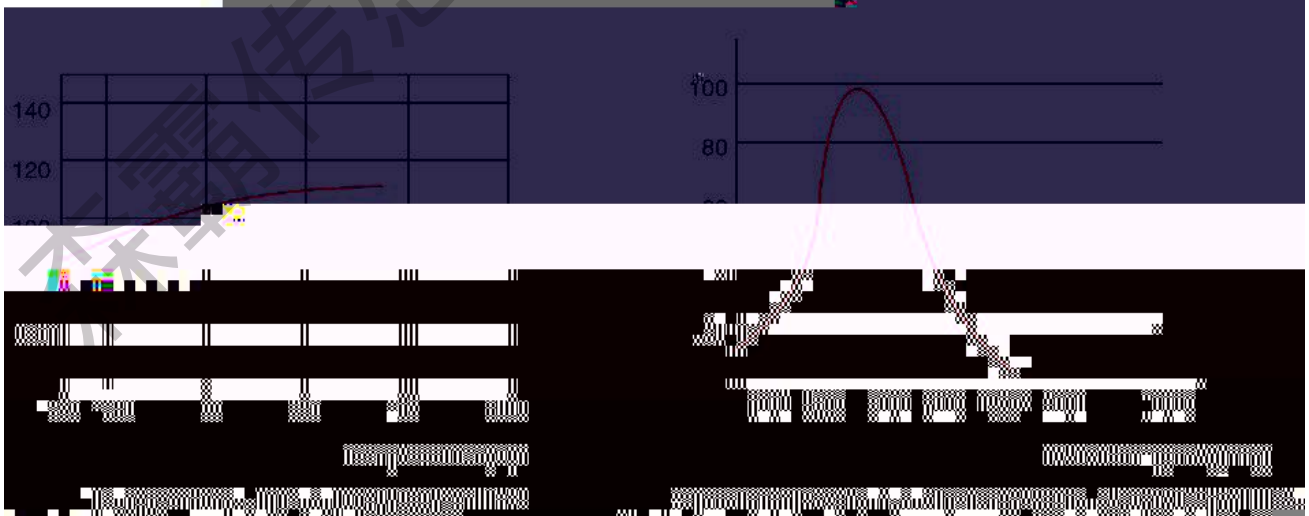





200